

### TECHNICAL INFORMATION SHEET




#### Description

**Karma Acoustic Perimeter Strip** is a cross-linked, closed cell polyethylene foam strip which is designed to reduce transmission of flanking sound around the perimeter of acoustically isolated floor systems. It is pre-scored on one side for ease of application.

#### Physical information

Total width	100mm
Score position	25mm
Thickness	5mm
Roll length	25m

#### Installation

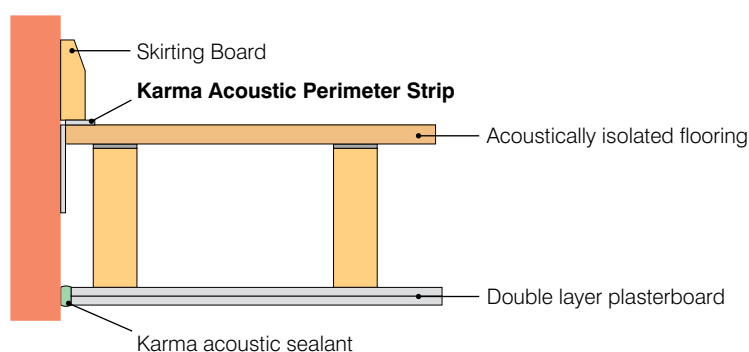

#### Benefits

- Isolates acoustic flooring system from adjacent structures
- Reduce transmission of flanking sound and impact noise
- Available in standard and custom widths
- Flexible and easily cut
- Simple to install
- Cost effective

#### Applications

The **Karma Acoustic Perimeter Strip** is applied around the perimeter of acoustic flooring systems to reduce both airborne and impact noise and is suitable for use in both commercial and residential applications, efficiently limiting the passage of flanking noise through the floor.

The **Karma Acoustic Perimeter Strip** is ideal for new, retrofit or renovation projects in offices, homes and hotel applications as it is so easy to fit, and can be used with acoustic battens, acoustic cradles and acoustic decking.

Flanking band isolates the flooring system from adjacent structures. The band is trapped against the wall and returned down over the flooring. The skirting board is then fixed to the wall securing the flanking strip between the skirting board and the acoustic flooring. After the skirting board is installed, simply trim the flanking strip flush with a sharp trimming knife.

#### Installation Service

In addition to supply of this product CMS Danskin Acoustic Solutions can provide a listing of competitively-priced approved installers that service anywhere in the UK. Use of this service ensures that installation is performed to the highest standards by tradesmen fully experienced in the specialist skills of fitting CMS Danskin acoustic materials correctly. Please contact CMS Danskin on 01925 577711 for a list of approved and qualified installers.

**IMPORTANT:** Directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product is suitable for the purpose intended.

#### Scotland Office:

1 Netherton Road, Wishaw ML2 0EQ

#### Central/Southern Office:

Unit 2 Lyncastle Road, Warrington, Cheshire WA4 4SN

email: [info@cmsdanskin.co.uk](mailto:info@cmsdanskin.co.uk) website: [www.cmsdanskin.co.uk](http://www.cmsdanskin.co.uk)

t: 01698 356000 f: 01698 372222

t: 01925 577711 f: 01925 577733