


## Cavity Closer

The range of ALTICLOSERS provide an easy, effective and economical solution when closing cavities within openings in masonry walls for windows and doors.

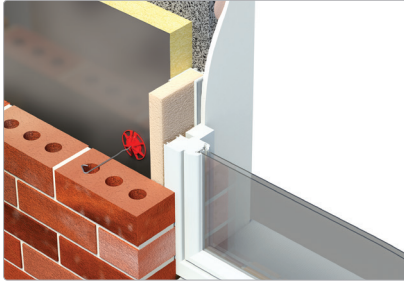

ALTICLOSER XPS

### ALTICLOSER XPS

The thermal ALTICLOSER XPS incorporates a UPVC outer which acts as a damp proof barrier while the insulated XPS core reduces thermal bridging.

ALTICLOSER XPS is available in options to suit check and flush reveal applications.




ALTICLOSER FR

### ALTICLOSER FR

ALTICLOSER FR offers 30 minute fire resistance performance within cavities up to a maximum width of 100mm.

The thermal and fire rated cavity closer incorporates a UPVC outer which acts as a damp proof barrier while the polythene enclosed rock mineral fibre core reduces thermal bridging and is a key feature of the products fire resistance capabilities.

ALTICLOSER FR is designed for installation within masonry cavities.

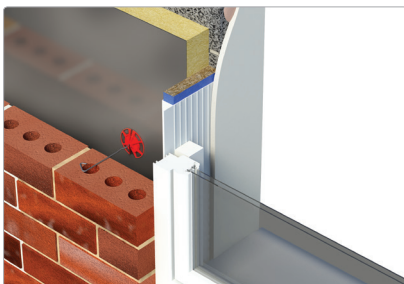

ALTICLOSER FR PLUS

### ALTICLOSER FR PLUS

ALTICLOSER FR Plus offers 60 minute fire resistance performance within cavities between 100mm – 175mm.

The thermal and fire rated cavity closer incorporates a UPVC outer which acts as a damp proof barrier while the foil sleeved rock mineral fibre core reduces thermal bridging and is a key feature of the products fire resistance capabilities.

ALTICLOSER FR Plus is designed for installation within masonry cavities & timber frame – masonry cavities.

### Product Data

Product	Thermal Values		Length (mm)	Width (mm)	Pack Size	Fire Resistance Performance
	Insulation Thickness (mm)	Thermal Conductivity (W/mK)				
ALTICLOSER XPS	25	0.033	2400	600	10	N/A
ALTICLOSER FR	25	0.035	2400	600	10	30 minutes integrity and 30 minutes insulation
ALTICLOSER FR PLUS	50	0.035	2400	600	10	60 minutes integrity and 30 minutes insulation

The information given is correct to the best of our knowledge at the time of publication but without guarantee of accuracy. We do not accept any responsibility for damage and claims arising from handling, transport, storage or disposal of the product. This data sheet, not a safety sheet, and applies only to the product named above. If the product is used as part of other products, information given in the data sheet may be invalidated. No warranty is hereby expressed or implied.